



DELTA B



The 19" vertical rails can be freely adjusted within the depth of the cabinet. It makes patch cords organization easy and effective.

It is possible to open front and rear part of the cabinet even if the cabinet is hung on the wall. This solution gives us comfortable access to all installed parts.

Perforation ensures natural cooling of installed equipment. The cooling can be if necessary forced by 19" fan units – see Accessories on www.triton.cz.





The construction of Delta B comes from Delta S and Delta D. The difference is in doors. The glass or fully metal doors can be opened in a range of 180° thanks to its robust hinges. The cabinets are produced in versions 4S, 5S, 2D and 5D. Height of the cabinet do not differ from original products. Numbers in the name show us an approximate depth of the cabinet in decimetres, letter S stands for the single-sectioned and letter D stands for the double-sectioned version. Exact sizes and other technical parameters are shown in the table in the following part of this flyer.

Very important parts of the cabinet are cable entries, which are located in the upper and in the bottom side. Entries are covered with a "break-out" style blanking panels, which can be broken out by a simple tool like screwdriver for example.

All 19" components are installed at the vertical rails, which can be easily adjusted back and forth in depth of the cabinet. Perforation provides natural air circulation and also cooling of installed components.



Cable entries are prepared in the top and bottom of the cabinet, two of them are also located at the back side of the cabinet. Each cable entry is blanked with a "break-out" style blanking panel that can be easily broken out by a simple tool like a screwdriver.

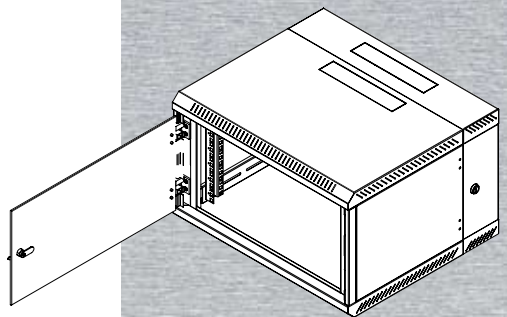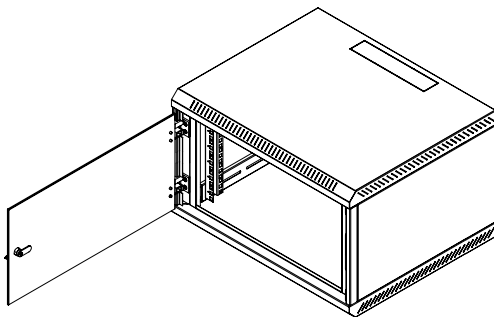



DELTA B

Type	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	R1 [mm]	R2 [mm]	Weight gross (kg)	Weight net (kg)	Max. permissible load (kg)
RBA-04-AS4-CAX-A1	280	175	490	600	395	234	420	12.7	12.4	30.0
RBA-06-AS4-CAX-A1	370	265	490	600	395	324	420	14.8	14.5	30.0
RBA-09-AS4-CAX-A1	500	395	490	600	395	454	420	17.8	17.4	30.0
RBA-12-AS4-CAX-A1	635	530	490	600	395	589	420	20.9	20.5	30.0
RBA-15-AS4-CAX-A1	770	665	490	600	395	724	420	24.0	23.6	30.0
RBA-18-AS4-CAX-A1	900	795	490	600	395	854	420	27.0	26.6	30.0

RBA-04-AS5-CAX-A1	280	175	490	600	495	234	420	14.5	14.2	30.0
RBA-06-AS5-CAX-A1	370	265	490	600	495	324	420	16.9	16.5	30.0
RBA-09-AS5-CAX-A1	500	395	490	600	495	454	420	20.1	19.7	30.0
RBA-12-AS5-CAX-A1	635	530	490	600	495	589	420	23.4	23.0	30.0
RBA-15-AS5-CAX-A1	770	665	490	600	495	724	420	26.7	26.3	30.0
RBA-18-AS5-CAX-A1	900	795	490	600	495	854	420	29.9	29.5	30.0

RBA-04-AD2-CAX-A1	280	175	490	600	295	234	420	11.9	11.6	20.0
RBA-06-AD2-CAX-A1	370	265	490	600	295	324	420	13.7	13.4	25.0
RBA-09-AD2-CAX-A1	500	395	490	600	295	454	420	16.8	16.5	30.0

RBA-04-AD5-CAX-A1	280	175	490	600	515	234	420	16.2	15.9	20.0
RBA-06-AD5-CAX-A1	370	265	490	600	515	324	420	18.3	17.9	20.0
RBA-09-AD5-CAX-A1	500	395	490	600	515	454	420	21.7	21.4	25.0
RBA-12-AD5-CAX-A1	635	530	490	600	515	589	420	25.4	25.1	25.0
RBA-15-AD5-CAX-A1	770	665	490	600	515	724	420	29.1	28.7	30.0
RBA-18-AD5-CAX-A1	900	795	490	600	515	854	420	32.5	32.1	30.0

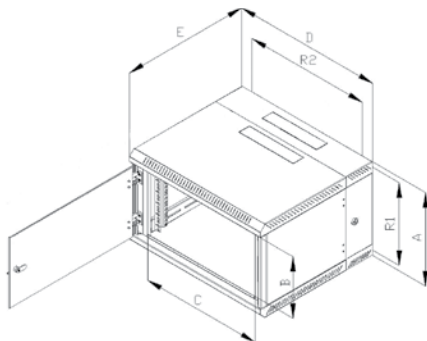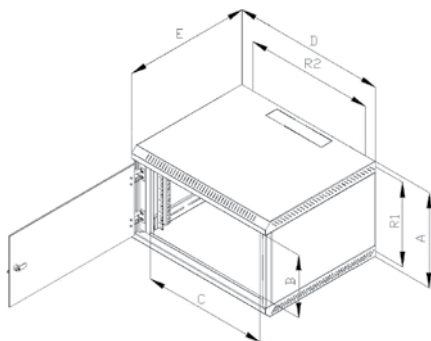

TRITON

Triton Pardubice, spol. s r. o.
 Starý Mateřov 130, 530 02 Pardubice - Czech Republic
 tel: +420 467 401 111, fax: +420 467 401 130
 sale@triton.cz, www.triton.cz

Triton Chemnitz GmbH
 Wolgograder Allee 24, 09123 Chemnitz - Germany
 Tel. +49 371 520 2271, Fax +49 371 520 2272
 info@triton-racks.de, www.triton-racks.de